

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 July 2004 (08.07.2004)

PCT

(10) International Publication Number
WO 2004/057835 A1

(51) International Patent Classification⁷: H04L 29/08, H04Q 7/32

(74) Agent: WUYTS, Koenraad, Maria; Koninklijke KPN N.V., P.O. Box 95321, NL-2509 CH The Hague (NL).

(21) International Application Number: PCT/EP2003/014463

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 17 December 2003 (17.12.2003)

(84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 02080485.2 23 December 2002 (23.12.2002) EP

(71) Applicant (for all designated States except US): KONINKLIJKE KPN N.V. [NL/NL]; Stationsplein 7, NL-9726 AE Groningen (NL).

(72) Inventor; and


(75) Inventor/Applicant (for US only): SELGERT, Franklin [NL/NL]; Penninglaan 30, NL-2651 BL Berkel en Rodenrijs (NL).

Declaration under Rule 4.17:
— of inventorship (Rule 4.17(iv)) for US only

Published:
— with international search report

[Continued on next page]

(54) Title: SETTING USER PREFERENCES VIA A MOBILE TERMINAL

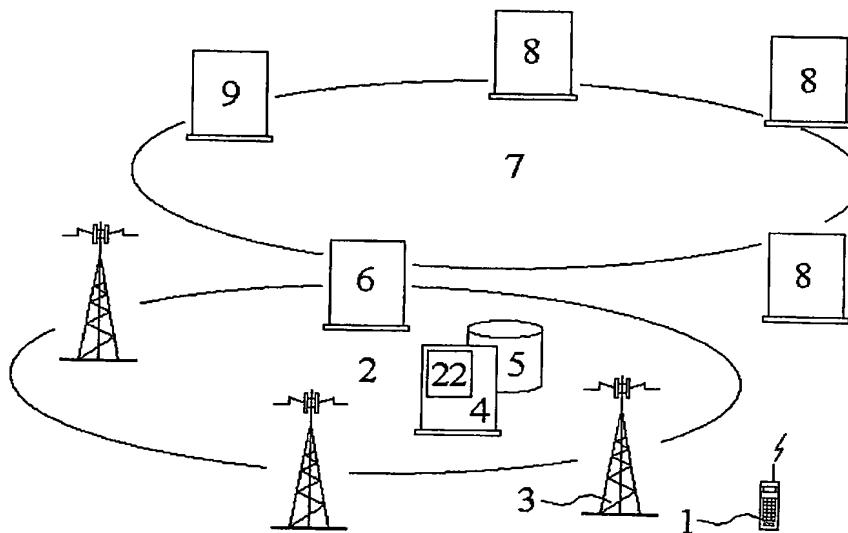

(57) Abstract: Method, system and terminal for setting, in an information system comprising a network (2, 7) connecting user terminals (1) and one or more servers (4, 8, 9), local user preferences valid for the terminal and non-local user preferences valid for said one or more servers. A preferences setting file is downloaded from one of said servers to the relevant terminal, which is completed by the terminal user with the user's local and/or non-local preferences. Subsequently, the completed preferences setting file is uploaded to the relevant server (9). One or more preference groups ("moods") may be assigned to the completed local and/or nonlocal preferences. The user may select one occurrence out of said preference groups, resulting in retrieval in the relevant server (9), the local and/or non-local preferences assigned to the selected preference group, and activating the relevant preferences in the terminal and the network and/or the one or more servers.



— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.